


**In HTML-code (relevant part):**

```
<td><a href="ViewPDF('0','ZZ')?_SID=1*6812332" target="_blank">Some text</a></td>
```

**In xBase-code (relevant part):**

```
WEBPROC ViewPDF( x1, x2 ) PATH WEB
    pdfFileName := writePDF ( )
    oClient:SendFile( pdfFileName )
RETURN
```

**In Browser:**

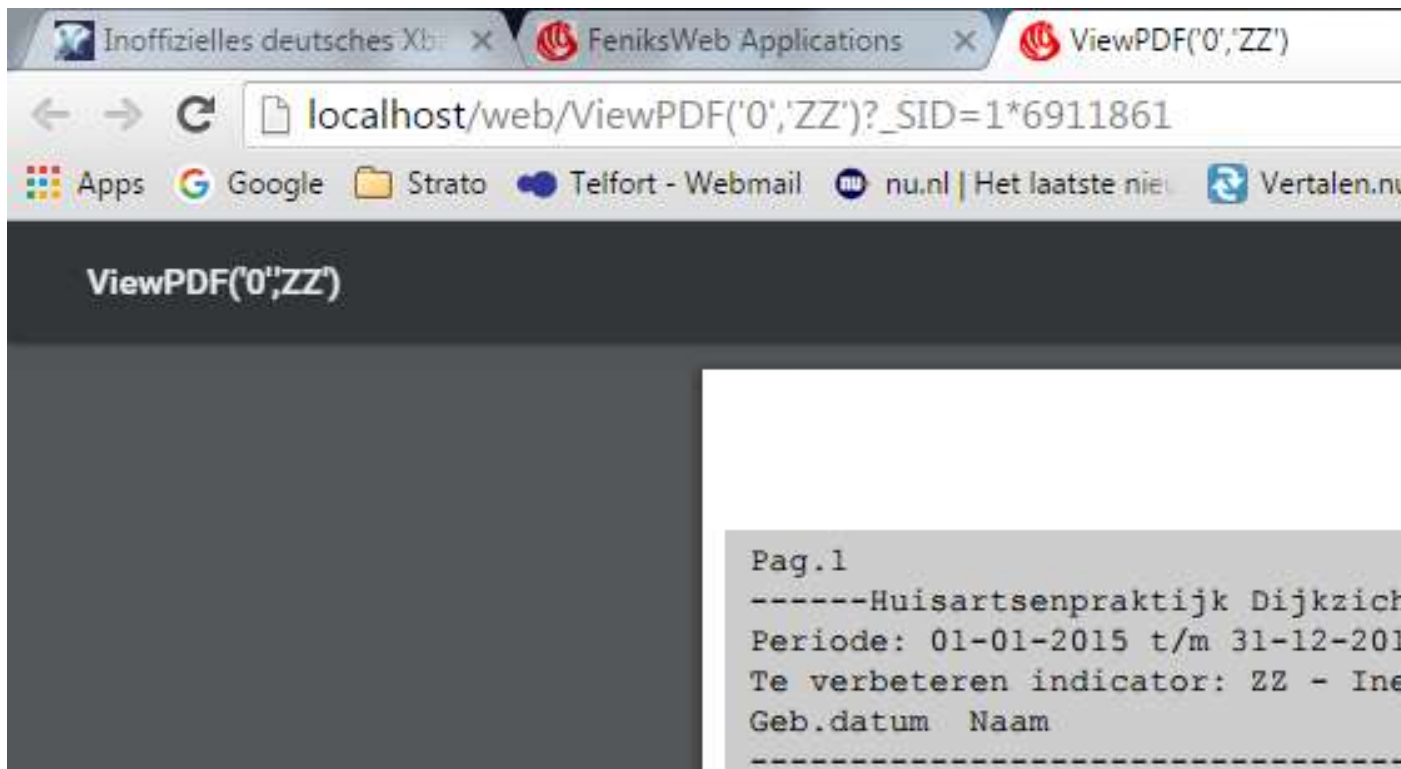

I would like to have control over the ViewPDF() in the browser-tab and in the PDF document which I want to give my own values!!

I have read about:

```
:SetHeader( "Content-Disposition","attachment; filename=" + cString )
```

but this has the very BIG disadvantage that the file is being downloaded instead of being shown in a browser-tab as requested by the html code (target="\_blank" )